

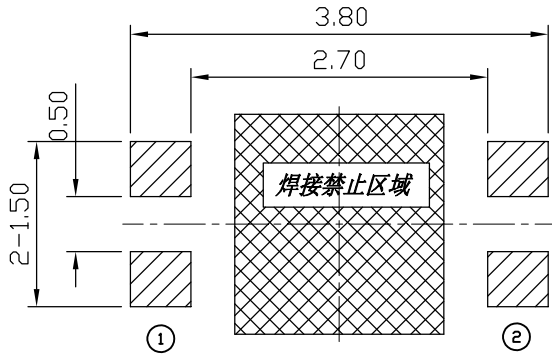
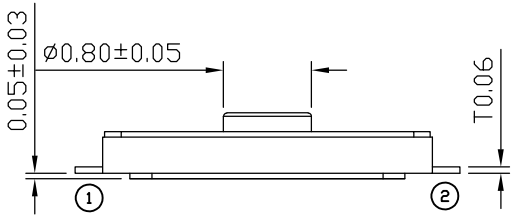





本公司智慧财产未经许可不得复制
ning biao copyright, may not be used without permission from ning biao.

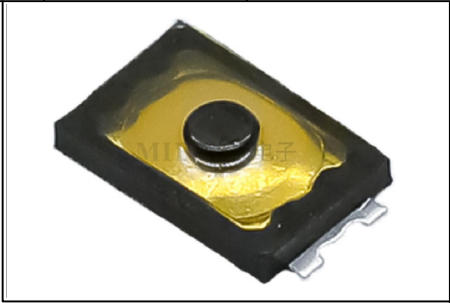


P.C.B LAYOUT



CIRCUIT

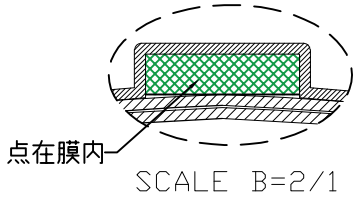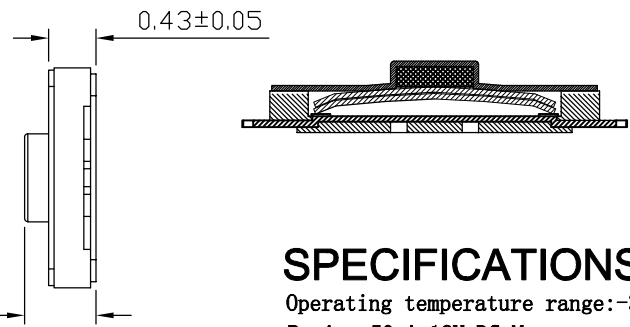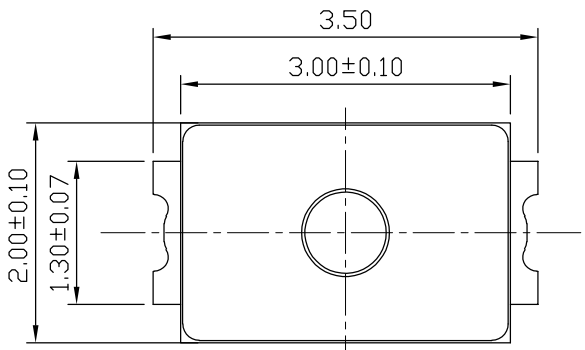

HOW TO ORDER:

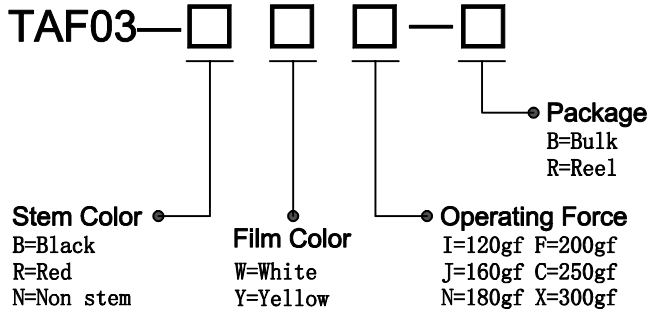

SPECIFICATIONS:

Operating temperature range: -30°C to +85°C
 Rating: 50mA, 12V DC Max
 Insulation resistance: 100MΩ min, 100V DC
 Dielectric strength: 100V AC for 1min
 Contact resistance: 100mΩ Max
 Life: I:J:N:300,000 Cycles F:C:X:100,000 Cycles
 Travel: 0.18±0.05mm
 Operating force: 180±50gf

		东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.						
TOLERANCE				DESIGN	DATE	TITLE	Tact Switch	
UNLESS OTHERWISE STATED				WYJ	2017. 10. 19			
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	TAF03-BY□-□	
X.XX	±0.15	REV	A					
X.XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3	
<	±2°	SCALE	15:1			PRINT DATE	2023.12.29	